

Comprehensive Autoencoder Forprostate Recognition on Mr Images

Dr.Sasmita Pani¹, Subhashree Sukla², Khitish Kumar Gadnayak

^{1,2}Associate Professor, Department of Computer Science Engineering, Gandhi Institute For Technology (GIFT), Bhubaneswar

³ Assistant Professor, Department of Computer Science Engineering, Gandhi Engineering College, Bhubaneswar

Abstract; Automatic recognition of anatomical structures is an essential prerequisite in computer aided diagnoses (CAD) such as tissue segmentation, physiological signal measurement and disease classification. However, insufficient color and speckle information in medical images pose challenges to the recognition of anatomical structures. Such challenges are evident with prostate recognition on magnetic resonance (MR) images and thus remain an open problem, although prostate cancer is an important problem that is attracting increasing interests in medical imaging. In this study, we propose an automatic approach for prostate recognition on MR images. Firstly, compared to existing works which integrate autoencoder with a specific type of classifier, we let autoencoder itself serve as a classifier and therefore lessening the impact from irregular and complex background found in prostate recognition. Secondly, an image energy minimization scheme with consideration of the coherence information from neighboring pixels is proposed to improve the recognition results with clear boundary appearance. We evaluate our method in comparison with three widely applied classifiers and the phase of atlas-based seeds-selection in prostate segmentation on a public prostate database. Our experiment results demonstrate significant superiority of our method in terms of both precision and F-measure.

Index Terms—prostate recognition, autoencoder, deep learning, classification

I. Introduction

The recognition and localization of anatomical structures are the prerequisite for many subsequent image processing procedures such as segmentation and classification [1]. It poses a challenging task because of the insufficient color information of pixels and low signal-to-noise ratio in medical images [2]. Previous work have been proposed to tackle anatomical structure recognition problems based on handcrafted features, such as steerable feature, on a wide array of imaging modalities, e.g., ileocecal valves [3], polyps [4], and livers [5] in abdominal CT, and heart chambers in ultrasound [6]. However, to our best knowledge, no work has been done on prostate recognition in MR images, although prostate cancer accounts for the second highest mortality rate among various types of cancer in males [7] and MR images prove effective for prostate diagnosis and treatments [8]. In addition to the insufficient color and speckle information, MR image artifacts, such as low contrast and blurred tissue boundary, make it even more difficult to accurately locate the prostate. Many prostate segmentation approaches, e.g., [9, 10] are often limited by the recognition techniques in prostate imaging, as accurate segmentation often requires approximate localization of the prostate object as initialization. To address this challenge, conventional prostate segmentations rely on semi-automatic methods thereby being dependent on the user [2, 11, 12]. Alternative approaches explore the use of an image at last to define the foreground/background seeds in prostate segmentation [9, 10]. However, as noted in prior studies [8], reliance on atlas are still prone to generating errors. While the above handcrafted-feature-based anatomical structure recognition methods [3-6] are technically sound, one major drawback is that the low-level features may fail to describe complex anatomical structure [13-16], and hence it dampens the recognition performance demonstrated by the experiment results of our work (Section 3.2) and inconsistent to [1, 17, 18]. Recently, autoencoder (AE) has been proven to effectively extract high level features from input data for (patch-based) image classifications [14, 15], object detections [19], and disease diagnosis [13, 20]. It learns a set of encoding weights to construct a code vector as the feature of input data, and then learns another set of decoding weights to map the code vector into an approximate reconstruction for the input data. Although AE can learn high-level features directly from the pixel intensity values, for its application to medical images, it may be insufficient for later tissue recognition or classification from the experiment results of existing works [13, 15], especially for the low-contrast images or blurred tissue boundaries. In this paper, to solve these issues, we propose a novel prostate recognition method on MR images by combining handcrafted features with AE. Our work has two major contributions. Firstly, different from the most works which embed a classifier on the top of the hidden layer in AE [13, 15, 19, 20], we propose a novel method to compute prostate recognition map through taking advantage of favorable capability of data reconstruction [21] from AE. Secondly, we design an image energy minimization scheme to generate

strongerprostaterecognitionmapwithconsideration ofthe relationshipamongneighboringpixels.

II. Methods

Ourmethodconsistsoftwostages.Inthefirststage,earlyfeaturedescriptorforthe prostateareproposedtoconstuctthetraininginputsforourproposedclassifierbasedontheAEframeworkasshowninFig.1(ab);theprobabilityofapixelbelongingtothe prostatecanbeapproximatedbyourtrainedstackedautoencoder(SAE)classifierasshowninFig.1(c).Inthesecondstage,wepropose anewenergyminimization schemetooptimizetheroughprobability mapofprostatefromtheoutputoffirststageasdescribedinFig.1(d).

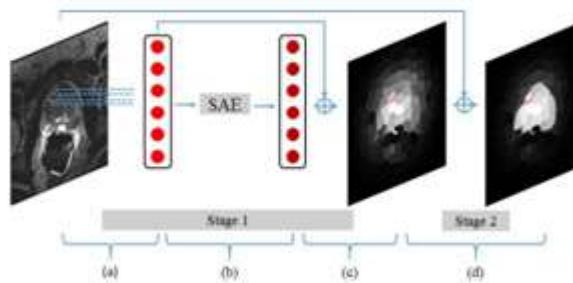


Fig. 1Pipeline of ourmethod.(a)Earlyfeature extraction.(b) Superpixelreconstructionvia proposed prostate AEmodel.(c) Superpixelclassification.(d)Refinement.

2.1.Earlyfeature descriptors

Insteadofmerely usingthepixelintensityvalues,weadopt twoearlyfeatures,i.e.theintensity descriptorandtheposition descriptor,whichreflectsmostcriticalinformationaboutpixelvalueandspatialinformation.Thesetwodescriptorsarethe inputsfortheAE.Inthiswork,weusesuperpixelastheatomichomogenousregioninfurtheroperationstoboostperformanceinrecognitionaroundtissueboundaries[22].Formally,animage $I \in R^{m \times n}$ issegmentedinto N superpixelsviatheSLIC algorithm[23].We denotea superpixelsas P .Assuggestedin[24],thesuperpixelisfirst $\{1,2\}$,where c_1 and c_2 arethetop-left coordinateandbottom-right coordinate of $C(P)$ in image $I \in R^{m \times n}$ respectively. $\alpha_{v,1}$ and $\alpha_{v,2}$ arethevaluesof c_v correspondingtox-axisand y-axisrespectively.Thepositiondescriptor $POS(P) \in R^{4 \times 1}$ vectorf (P) isderivedfor P asfollows

2.1.1. Intensity descriptor
For the intensity histogram $IH(P)$ of superpixel P , the number f binsissetto20 empirically inourexpperiment. Then theintensity histogram $IH(P) \in R^{20 \times 1}$ isnormalizedto have auniformsumto eliminatetheeffectcausedby the differentnumber of pixelswithin differentsuperpixels.

2.1.2. Position descriptor
Sincethesuperpixelsareofirregularshapes,weexploit boundingboxestoproximate theirspatialallocations. We denotetheboundingboxof P as $C(P) = \{c_v(\alpha_{v,1}, \alpha_{v,2}): v =$

$1,2\}$,where c_1 and c_2 arethetop-left coordinateandbottom-right coordinate of $C(P)$ in image $I \in R^{m \times n}$ respectively. $\alpha_{v,1}$ and $\alpha_{v,2}$ arethevaluesof c_v correspondingtox-axisand y-axisrespectively. Thepositiondescriptor $POS(P) \in R^{4 \times 1}$ ofsuperpixel P isthen calculatedby

$$POS(P) = \left\{ \frac{\alpha_{v,1}}{(c_2 - c_1) + (u - 1)} \right\}_{v=1,2; u=1,2} \quad (1)$$

2.1.3. Early feature vector
Withtheearlyfeaturedescriptorproposedabove,a superpixel-wisefeaturevector $f(P)$ with24dimensionsis generatedas

$$f(P) = \{IH(P); POS(P)\} \in R^{24 \times 1} \quad (2)$$

2.2.Prostatestackedautoencodermodel

After obtaining the early feature vectors of prostate superpixels, we can build a SAE[13] to extract high-level features and perform reconstruction of input for later classification. While most works [13, 15] train AE by both positive and negative samples, the training set in our work consists of only positive samples, which focuses on the prostate feature extraction and thus lessens the impacts by the irregular and complex background that may impede feature extraction. To train a single hidden layered prostate AE, a training set $F = \{f(P_i) : i=1, \dots, K\}$ containing K early feature vectors of prostate superpixels are input to the AE network. The input vector $f(P_i)$ is transformed into a hidden feature representation a_i by an activation function $g(\cdot)$ with the following formula:

$$a_i(f(P_i); \theta^{(1)}) = g(W^{(1)} f(P_i) + b^{(1)}) \quad (3)$$

where $\theta^{(1)}$ is the parameter vector including weight matrix $W^{(1)}$ and bias term $b^{(1)}$; as a common practice, we use the sigmoid function $g(\phi) = 1/(1 + \exp(-\phi))$ as the activation function. A decoder then maps the hidden feature

$$\hat{f}(P_i)(a_i; \theta^{(2)}) = g(W^{(2)} a_i + b^{(2)}) \quad (4)$$

~~With the training set F of K samples, the latent features of input data can be learned by minimizing the cost function~~

$$J(\theta) = \frac{1}{K} \sum_{i=1}^K \frac{1}{2} \|f(P_i) - \hat{f}(P_i)\|^2 + \frac{\lambda}{2} \sum_{i=1}^K \sum_{j=1}^{s^{(1)} s^{(2)}} (W_{ij})^2 \quad (5)$$

We further construct SAE[19, 21] to learn highly nonlinear and complex patterns, and perform feature presentation in the input images. As shown in Fig. 2, in a SAE structure, the early feature vector is input to the first (bottom) AE, the hidden nodes of which are concatenated as a new feature vector to the subsequent (higher-level) AE. The greedy layer-wise algorithm is adopted to obtain the corresponding parameter $\theta^{(l)}$ of the l -th layer, and back-propagation is then applied to tune the parameters of all layers at one time. Typically in our work, we stack three AEs to construct the prostate SAE model and hence obtain a totally six-layer network including three encoding layers and three decoding layers (Fig. 2).

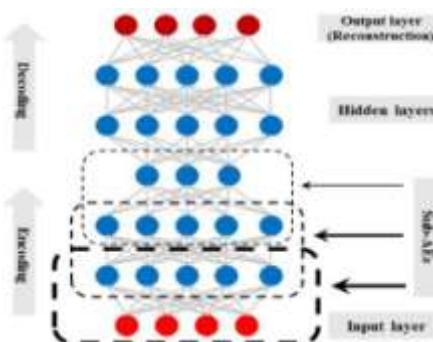


Fig.2 Architecture of the proposed SAE. The output of each layer is the input for its subsequent layer. The output of the last layer is a reconstruction for input data.

2.3.Superpixelclassification

With the trained prostate SAE model, the superpixels of the input image can thus be classified for prostate recognition. As the SAE model is learned from the set of prostate superpixels (positive samples), the unlabelled superpixels belonging to prostate have low reconstruction errors, while those belonging to background have high reconstruction errors. Hence, we use the reconstruction error to measure the probability $D^{sp_AE}(P)$ of a superpixel P being prostate tissue:

$$D^{sp_AE}(P) = \exp(-\tau \times err(P)) \quad (8)$$

where τ controls the distance between different superpixel's reconstruction errors within an image and is set to 100 empirically.

With calculating D^{sp_AE} of all the superpixels in an image $I \in \mathbb{R}^{m \times n}$, we may obtain a rough prostate recognition map $D^{AE} = \{d^{AE}_i | i \in [0, 1] : i = 1, \dots, m \times n\}$ after normalization of D^{AE} , as shown in the third column of Fig. 3.

2.4. Refinement

The rough prostate recognition map D^{AE} may generate wrong labels of background near the prostate, as it is a local estimation without considering the spatial and intensity coherence among superpixels. In this sub-section, a refined prostate recognition map with better suppressed background, more smooth inner region and clear boundary is generated based on D^{AE} . Given a one-channel image I , our task in this stage is to assign a label $O_p \in \{0, 1\}$ to a pixel p to measure whether p belongs to foreground or not. For the set of pixels' labelling $O = \{O_p : p \in I\}$, this can be solved by minimizing the energy function [26]

$$E(O) = \sum_{p \in I} H(O_p)$$

Different from other deep learning algorithms (i.e. convolutional neural network), AE is capable of not only intrinsic and latent feature learning for input data (3), but also data reconstruction (4). Therefore, we can calculate the reconstruction errors defined in (7) for each superpixel in a prostate MR image through the fixed prostate SAE model. Specifically, with the all parameters $I = \{\theta^{(l)} : l = 1, \dots, L\}$ learned in SAE, for a superpixel P , set

$$f(P)^{(l+1)} = g(W^{(l)} f(P)^{(l)} + b^{(l)}) \quad (6)$$

where l is the index of network layer. We initialize the first step of the iteration $f(P)^{(1)}$ as the early feature vector $f(P)$ of the superpixel P . Then the reconstruction error of P is calculated by $f(P)$ and $f(P)^{(L+1)}$:

$$+\xi \sum_{(p,q) \in Y} \frac{1}{1 + \sqrt{3}(I_p - I_q)^2} \cdot T(O_p \neq O_q) \quad (9)$$

where Y is a set of all pairs of neighboring pixels. $H(O_p)$ is the cost for assigning a label O_p to a pixel p . We directly use local estimated recognition map D^{AE} to approximate the label-cost of pixels. Specifically, $H(O_p)$ is set to $D^{AE}(p)$ if O_p is a background label and $1 - D^{AE}(p)$ if O_p is a foreground label. The second term in (9) encourages intensity and spatial coherence by penalizing discontinuities [27] between neighboring pixels, with the parameter ξ controlling the scale of discontinuity penalty. $T(\cdot)$ is 1 if the condition inside the parentheses is true and 0 otherwise. We adopt maximum flow algorithms [27] to minimize (9) and generate the corresponding prostate recognition map

D^{mf} . Then the final prostate recognition map $D = (D^{AE} + D^{mf})/2$ is formed to measure the probability of each pixel being prostate.

III. Experiments


3.1. Experimental setup

The prostate MR Image Segmentation 2012 (PROMISE12) database [28] is used in this study. It contains 50 cases, with each case composed of 15 to 54 prostate transverse T2-weighted MR images. Manual segmentation are available for each case and used as the ground truth.

In the prostate SAE model, the hyperparameters of each sub-AE, i.e. the number of hidden nodes Z , and weight decay parameter λ , are derived empirically and listed in Table 1. As suggested in [26], to achieve better performances, we compute five recognition maps using five superpixel scales with $N = 200, 250, 300, 350, 400$ respectively in an image. pixels around the boundary of prostate. However, from Table 2, it can be seen that our proposed refinement improves all the methods in precision and F-measure.

Table 1: Hyperparameters in the prostate SAE model.

	sub-AE1	sub-AE2	sub-AE3
Z	60	40	16
λ	8e-4	4e-4	4e-4

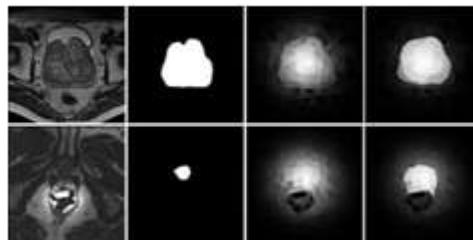
Fig.3 Examples of prostate recognition results by our method. Left to right: raw image, ground truth, rough recognition map by the first stage, and final recognition map.

		Precision	F-measure	
		Not Refined	Not Refined	Refined
Method	Refined			
OURS	0.8518	0.8699	0.6798	0.6832
RW	0.8284	0.8286	0.6617	0.6220
SVM	0.5554	0.6394	0.5413	0.6238
RF	0.4870	0.5506	0.5189	0.5766
NB	0.3539	0.4894	0.3906	0.5033


Table 2: Precision and F-measures of our method and comparison methods for prostate recognition on PROMISE12 database. The best results in each column are shown in bold.

Then, we linearly combine the five recognition maps as the final recognition result.

We perform 10-fold cross-validation on the dataset. For each image, we first resize it to 320*320 pixels, and then increase its contrast by mapping the intensity values to new values such that 1% of data is saturated at low and high intensities of the image [29]. An atlas-based seeds-selection in segmentation approach (RW) [9] and three popular classifiers, i.e. support vector machine (SVM) with radial basis function kernel, random forest (RF), and naive Bayes (NB), are chosen as comparison methods.

3.2. Evaluation

We evaluate the recognition performance using precision-recall (PR) curve and F-measure [20, 26]. Both Table 2 and Fig. 4 show that our method outperform the four comparison methods in terms of both PR curve and F-measure. More specifically, even our unrefined results outperform the refined results of the comparison methods in precision. This is mainly attributed to the SAE for high-level feature learning and data reconstruction, while the comparison methods recognize prostate directly from the low-level early features. Fig. 3 qualitatively demonstrates that our proposed refinements significantly contribute to foreground smoothness and background suppression. The refinement poses relatively low effect around the prostate with blurred boundary as illustrated in the second row of Fig. 3. The reason is that the neighboring pixels around the boundary does not differentiate much, thus causing a large penalty in the second term of (9), which encourages to assign same label to these

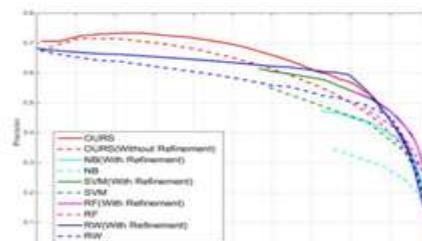
Fig.4 PR curves of our method and comparison methods for prostate recognition on PROMISE12 database. The recognition results by comparison methods are also refined by our proposed approach for better evaluation (solid lines).

IV. Conclusion

We propose an automatic prostate recognition method on MR images based on SAE. Compared to the most existing works with AE, we let the SAE itself serve as a classifier to focus on the prostate feature extraction. A image energy minimization scheme is then proposed to optimize the prostate recognition map constructed by SAE. Our method is compared against three benchmark classifiers and atlas-based seeds-selection approach on the PROMISE12 database, demonstrating superiority in both PR curves and F-measures.

References

- [1] J.Y.Zheng,B.Georgescu,H.Ling,S.K.Zhou,M.Scheuering, and D.Comaniciu,"Constrained marginal space learning for efficient 3D anatomical structure detection in medical images," in Computer Vision and Pattern Recognition, 2009. CVPR 2009. IEEE Conference on, 2009, pp.194-201.
- [2] M. Samiee, G.Thomas, and R.Fazel-Rezai, "Semi-automatic prostate segmentation of MR images based on flow orientation," in Signal Processing and Information Technology, 2006 IEEE International Symposium on, 2006, pp.203-207.
- [3] L.Lu,A.Barbu,M.Wolf,J.Liang,L.Bogoni,M.Salganicoff, et al., "Simultaneous detection and registration for ileo-cecal valve detection in 3D CT colonography," in Computer Vision-ECCV 2008, ed: Springer, 2008, pp.465-478.
- [4] L.Lu,A.Barbu,M.Wolf,J.Liang,M. Salganicoff, and D. Comaniciu, "Accurate polyp segmentation for 3DCT colonography using multistaged probabilistic binary learning and compositional model," in Computer Vision and Pattern Recognition, 2008. C VPR 2008. IEEE Conference on, 2008, pp.1-8.
- [5] H.Ling,S.K. Zhou,Y. Zheng,B.Georgescu,M. Suehling, and D.Comaniciu,"Hierarchical, learning-based automatic liver segmentation," in Computer Vision and Pattern Recognition, 2008. CVPR 2008. IEEE Conference on, 2008, pp.1-8.
- [6] L.Yang,B.Georgescu,Y.Zheng, P.Meer, and D.Comaniciu, "3D ultrasound tracking of the left ventricle using one-step forward prediction and data fusion of collaborative trackers," in Computer Vision and Pattern Recognition, 2008. CVPR 2008. IEEE Conference on, 2008, pp.1-8.
- [7] M.M.Center,A.Jenal,J.Lortet-Tieulent,E.Ward,J.Ferlay,O.Brawley, et al., "International variation in prostate cancer incidence and mortality rates," European urology, vol.61, pp.1079-1092, 2012.
- [8] S.Ghose,A.Oliver,R.Martínez,Lladó,J.C.Vilanova,J.Freixenet, et al., "A survey of prostate segmentation methodologies in ultrasound, magnetic resonance and computed tomography images," Computer methods and programs in biomedicine, vol.108, pp.262-287, 2012.
- [9] A.Li,C.Li,X.Wang,S.Eberl,D.D.Feng, and M.Fulham, "Automated Segmentation of Prostate MR Images Using Prior Knowledge Enhanced Random Walker," in Digital Image Computing: Techniques and Applications (DICTA), 2013 International Conference on, 2013, pp.1-7.
- [10] S.Martin,V.Daanen, and J.Troccaz, "Atlas-based prostate segmentation using an hybrid registration," International Journal of Computer Assisted Radiology and Surgery, vol.3, pp.485-492, 2008.
- [11] R.Zwiggelaar,Y.Zhu, and S.Williams, "Semiautomatic segmentation of the prostate," in Pattern Recognition and Image Analysis, ed: Springer, 2003, pp.1108-1116.
- [12] D.Flores-Tapia,G.Thomas,N.Venugopa,B.McCurdy, and S.Pistorius, "Semiautomatic MRI prostate segmentation based on wavelet multiscalar products," in Engineering in Medicine and Biology Society, 2008.EMBS 2008.30th Annual International Conference of the IEEE, 2008, pp. 3020-3023.
- [13] S.Liu,S.Liu,W.Cai,S.Pujol,R.Kikinis, and D.Feng, "Early diagnosis of Alzheimer's disease with deep learning," in Biomedical Imaging (ISBI), 2014 IEEE 11th International Symposium on, 2014, pp.1015-1018.
- [14] Q.Li,W.Cai, and D.Feng, "Lung image patch classification with automatic feature learning," in Engineering in Medicine and Biology Society (EMBC), 2013 35th Annual International Conference of the IEEE, 2013, pp. 6079-6082.
- [15] D.Kumar,A.Wong, and D.A.Clausi, "Lung Nodule Classification Using Deep Features in CT Images," in Computer and Robot Vision(CRV), 2015 12th Conference on, 2015, pp.133-138. [16] L.Wang,H.Lu,X.Ruan, and M.-H.Yang, "Deep Networks for Saliency Detection via Local Estimation and Global Search," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2015, pp.3183-3192.
- [16] R.Fakoor,F.Ladhak,A.Nazi, and M.Huber, "Using deep learning to enhance cancer diagnosis and classification," in Proceedings of the International Conference on Machine Learning, 2013.
- [17] Y.Zheng,A.Barbu,B.Georgescu,M.Scheuering, and D. Comaniciu, "Four-chamber heart modeling and automatic segmentation for 3D cardiac CT volumes using marginal space learning and steerable features," Medical Imaging, IEEE Transactions on, vol.27, pp. 1668-1681, 2008.
- [18] J.Han,D.Zhang,S.Wen,L.Guo,T.Liu, and X.Li, "Two-Stage Learning to Predict Human Eye Fixations via SDAEs," 2015. [20] J. Xu,L. Xiang,Q.Liu,H.Gilmore,J.Wu,J.Tang, et al., "Stacked Sparse Autoencoder (SSAE) for Nuclei Detection on Breast Cancer Histopathology images," 2015.
- [19] Y.Bengio,A.Courville, and P.Vincent, "Representation learning: A review and new perspectives," Pattern Analysis and Machine Intelligence IEEE Transactions on, vol.35, pp.1798-1828, 2013.
- [20] X.Ye,G.Beddoe, and G.Slabbaugh, "Automatic graph cut segmentation of lesions in CT using mean shift superpixels," Journal of Biomedical Imaging, vol.2010, p. 19, 2010.
- [21] R.Achanta,A.Shaji,K.Smith,A.Lucchi,P.Fua, and S. Susstrunk, "SLIC superpixels compared to state-of-the-art superpixel methods," Pattern Analysis and Machine Intelligence, IEEE Transactions on, vol.34, pp.2274-2282, 2012.
- [22] N.Wang,J.Melchior, and L.Wiskott, "An analysis of Gaussian binary restricted Boltzmann machines for natural images," in European Symposium on Artificial Neural Networks, Computational Intelligence and Machine Learning (ESANN), 2012, pp.287-292.
- [23] Y.Ouyang,W.Liu,W.Rong, and Z.Xiong, "Autoencoder Based Collaborative Filtering," in Neural Information Processing, 2014, pp.284-291.
- [24] N.Tong,H.Lu,X.Ruan, and M.H.Yang, "Salient Object Detection via Bootstrap Learning," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2015, pp.1884-1892.
- [25] Y.Boykov and V.Kolmogorov, "An experimental comparison of mincut/maxflow algorithms for energy minimization in vision," Pattern Analysis and Machine Intelligence, IEEE Transactions on, vol.26, pp. 1124-1137, 2004.
- [26] G.Litjens,R.Toth,W.vandeVen,C.Hoeks,S.Kerkstra,B. van Ginneken, et al., "Evaluation of prostate segmentational algorithms for MRI: the PROMISE12 challenge," Medical image analysis, vol.18, pp.359-373, 2014.
- [27] S.Qureshi, Embedded image processing on the TMS320C6000TMDSP: examples in code composer studio T and MATLAB: Springer Science & Business Media, 2005.